



ProVenture





Solutions Limited

ProV150 Injection Resin System

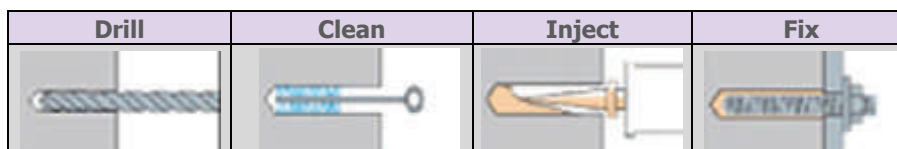
Features

- Cures at -15°C
- Non flammable.
- Excellent chemical resistance.
- Suitable for underwater applications.
- Mild odour.
- Suitable for close to the edge application.
- Suitable for hollow base materials including concrete, brick and stone.






Suitable Applications

Concrete	Blockwork	No fines	Brickwork
			

Setting Instructions



Setting Times

Temperature (°C)	-15	-10	-5	0	5	10	15	20	25	>30
ProV150 gel time (min)	5hrs	3hrs	40	20	15	12	9	6	4	2
ProV150 setting time (min)	24hrs	20hrs	150	120	105	90	75	60	45	35
Hilti HY150 Resin setting time (min)			360	180	90		50			40

Accessories

<p>Chemical Anchor Rod</p>  <p>Sizes M8 to M30, Available in Zinc Plated grade 5.8, hot dipped galvanised & Stainless steel A4-70/316</p>	<p>Resin Sleeve</p>  <p>Sizes M8 to M16, To be used in conjunction with injection resin and threaded rod for fixing in hollow base materials.</p>
<p>Injection Resin Dispenser</p>  <p>for use with ProV150 injection resin</p>	<p>Blow Out Pump</p> 
<p>Resin Mixer Nozzle</p> 	<p>Hole Cleaning Brush</p> 

ProVenture Solutions Limited, Towngate Works, Dark Lane, Mawdesley, Ormskirk, L40 4BN

Tel (01704) 823555 Fax (01704) 822213 Mob (07764) 602702 Email sales@proventure.co.uk